

Your company name and address

Test Report no. 2006.06.30, 14.55.04.LBD

 **LBD013**

Style: SA 3200-06
 Lot: 5190-06
 Piece: 17
 Customer: Textile Ltd

Date/time: 06/30/2006, 14:55 - 06/30/2006, 14:56
 Operator: J. Smith

Hydrostatic Head - Dynamic Test Method


Rate of rise: 60 mbar/min
 Test area: 100 cm²

Date/time: 06/30/2006, 14:55 - 06/30/2006, 14:56
 Instrument: Textest FX 3000-III, s/n: 674

	<i>1st drop</i>	<i>3rd drop</i>
1:	1'630 mbar	1'770 mbar
2:	1'600 mbar	1'690 mbar
3:	1'790 mbar +	1'860 mbar +
4:	1'550 mbar	1'630 mbar
5:	1'610 mbar	1'760 mbar

Commentary:

Avg:	1'640 mbar	Nominal:	1'600 mbar
Min:	1'550 mbar	Min:	1'500 mbar
Max:	1'790 mbar +	Max:	1'700 mbar
CV:	5.6 %	Tests:	5
CI:	6.9 %	CI:	3.0 %

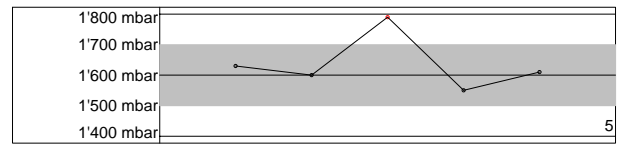

Avg:	1'740 mbar	Nominal:	1'700 mbar
Min:	1'630 mbar	Min:	1'600 mbar
Max:	1'860 mbar +	Max:	1'800 mbar
CV:	5.0 %	Tests:	5
CI:	6.2 %	CI:	3.0 %

